




**A
R**
Series

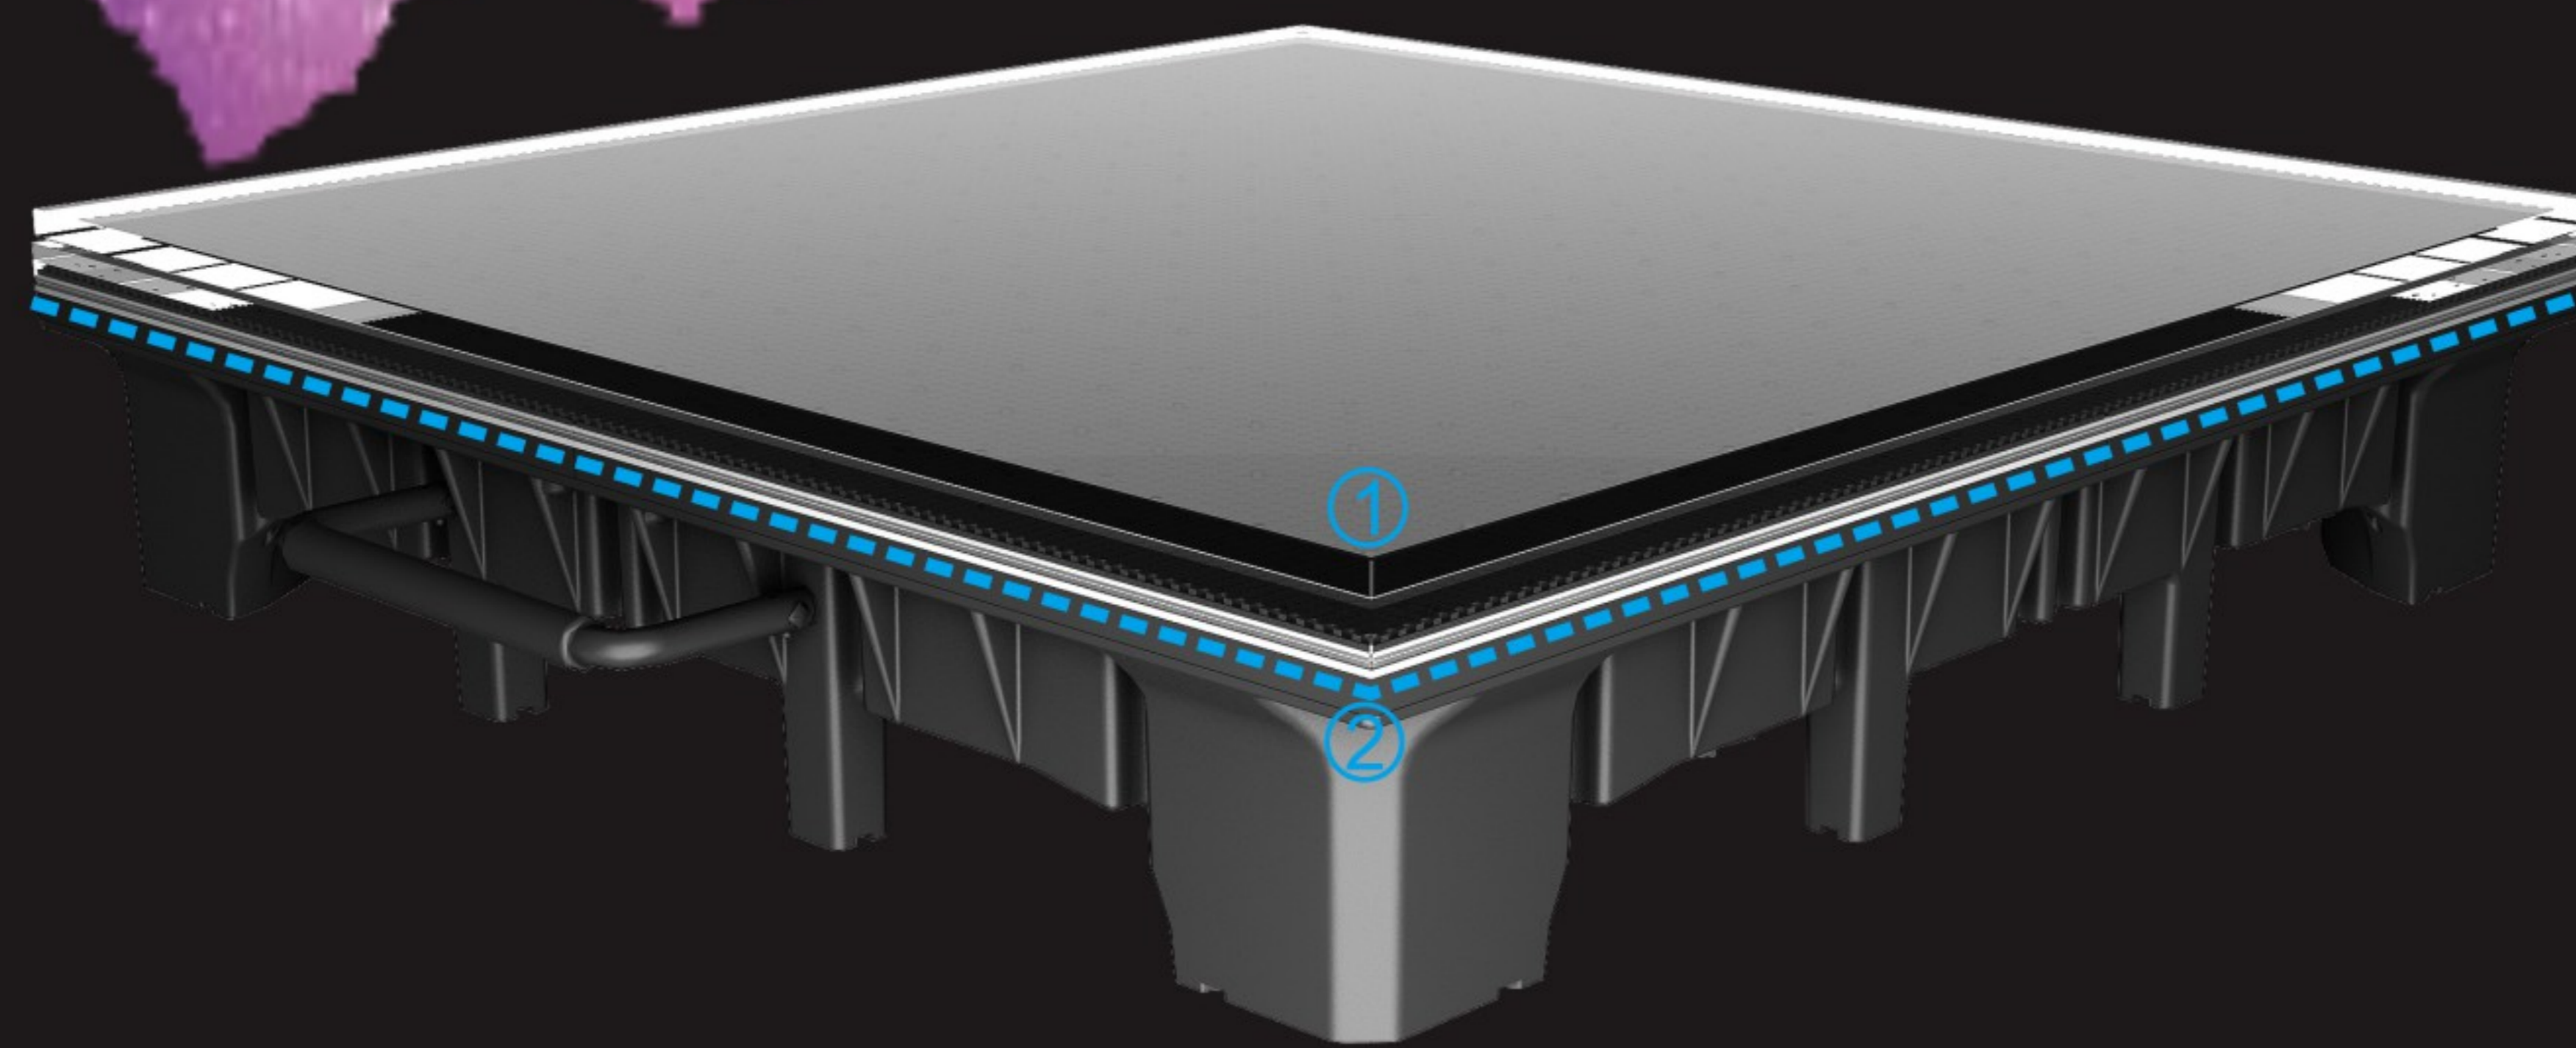

- ① Ultra high bearing capacity with more than 2 tons
- ② Edge-wrapping aided design, Higher end atmosphere

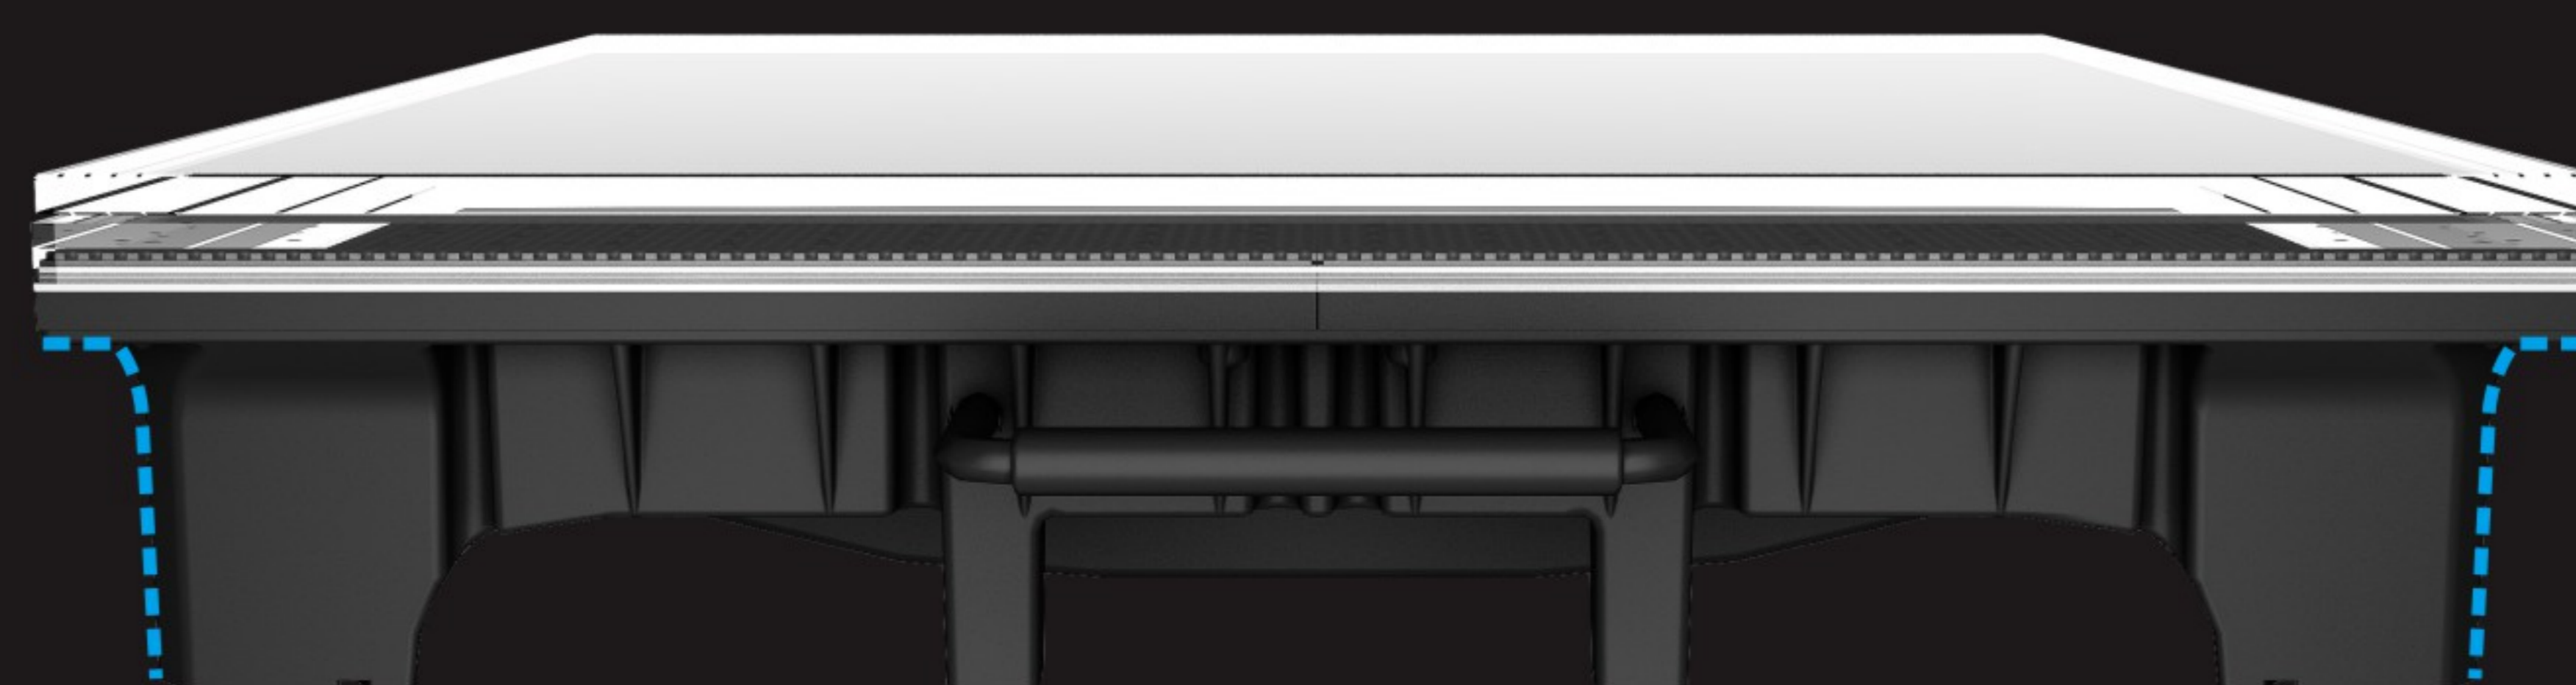

Unique panel bevelled design ,More in line with the needs of stage lifting

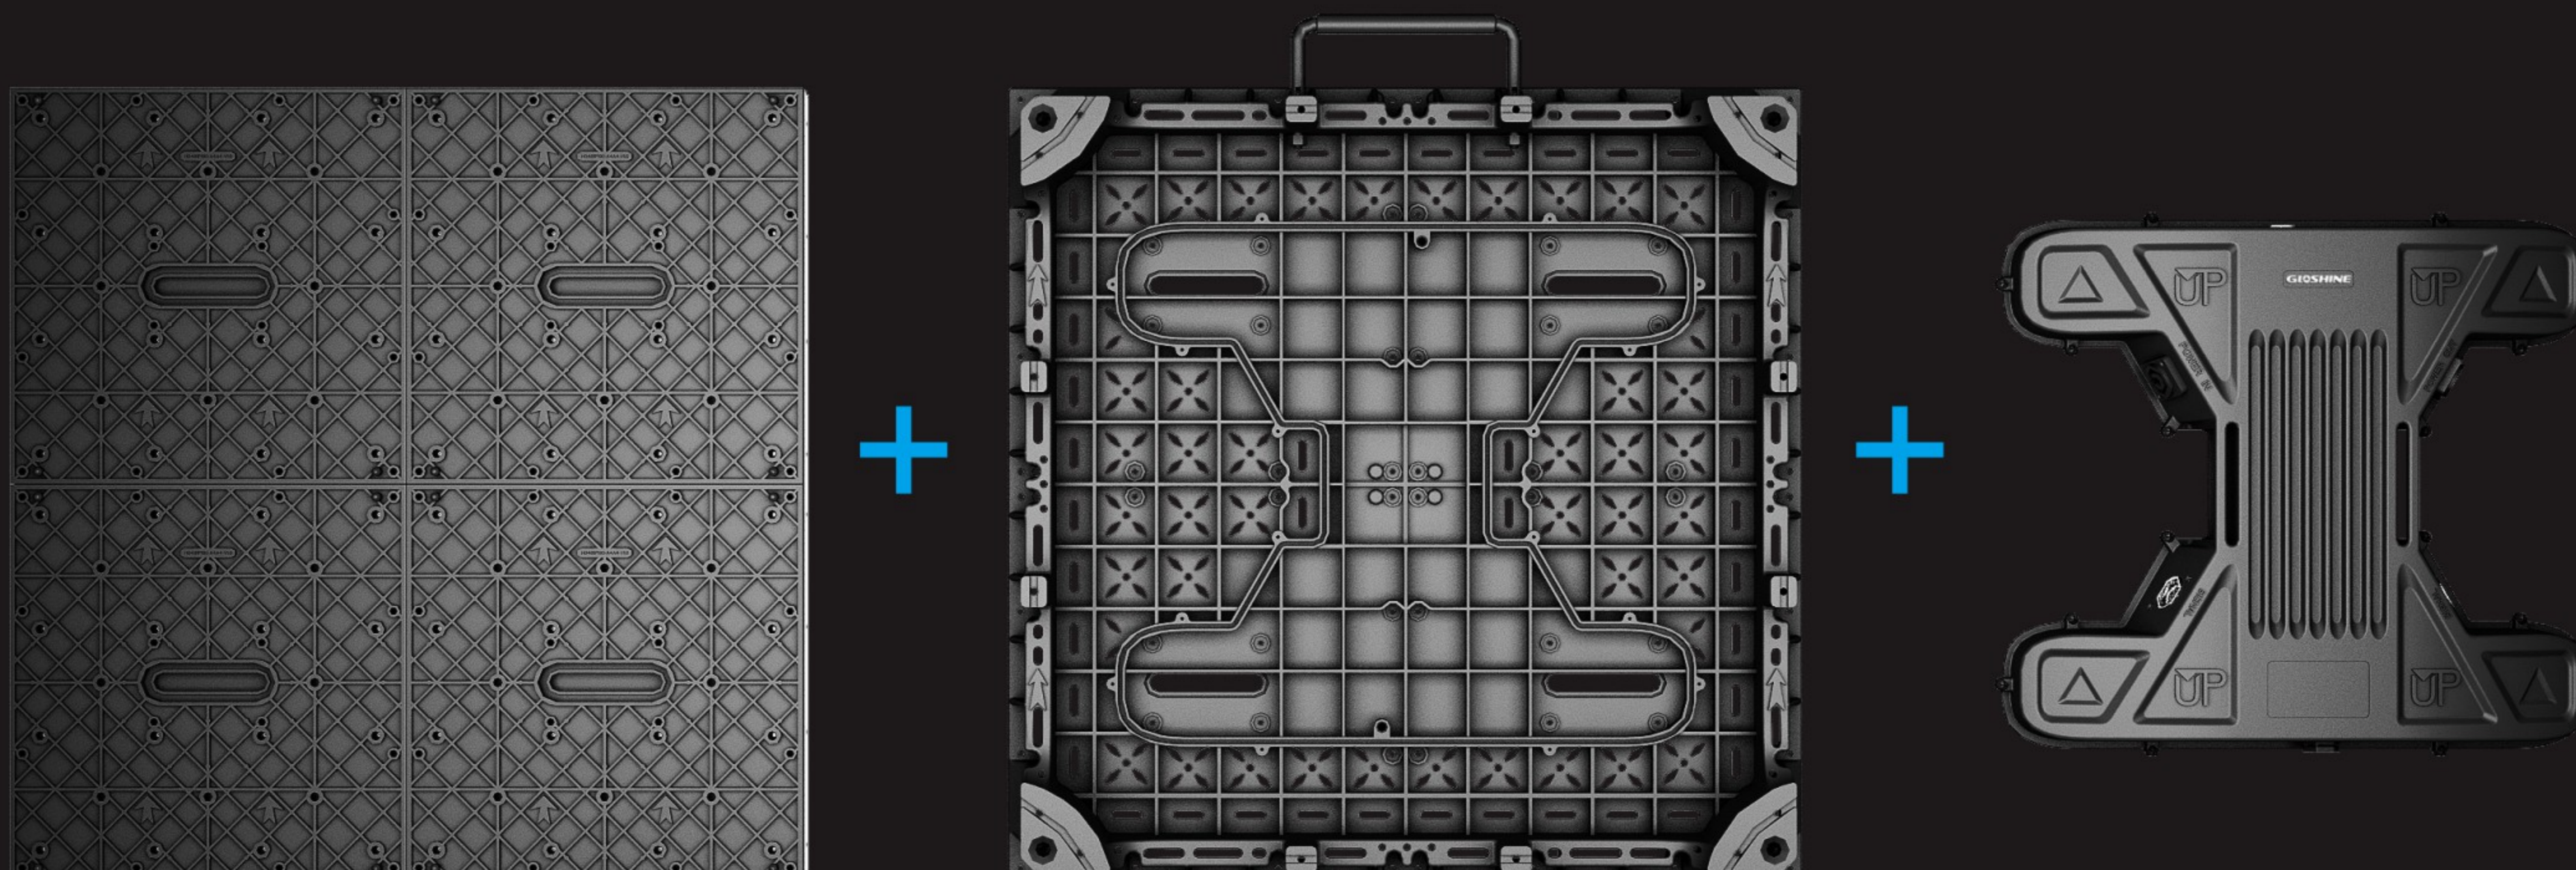

Integrated panel design



CCTV Spring Festival Gala -Shenzhen parallel sessions 3100m² AR4.81

Model No.	AR2.6(indoor)	AR3.9(indoor)	AR3.9(outdoor)	AR4.8(outdoor)
Pixel pitch	2.6mm	3.91mm	3.91mm	4.81mm
LED type	SMD1515/SMD2020	SMD1415	SMD1921	SMD1921
Packaging method	GOB	PC	Glass	
Pixel density	147456 pixel/m ²	65536 pixel/m ²	65536 pixel/m ²	43264 pixel/m ²
Panel resolution	192*192 pixel	128*128 pixel	128*128 pixel	104*104 pixel
Scan rate	1/24	1/16	1/16	1/13
Brightness	800-1000nits	800-1200nits	800-1200nits	800-1200nits
Color temperature	6500-9500K	6500-9500K	6500-9500K	
Panel dimension(W*H*D)	500*500*88.5mm	500*500*96mm	500*500*100mm	
Panel weight	9.5kg(20.94lb)±10%	12kg(26.45lb)±10%	Small:14.44kg(31.83lb)±10%	
Frame material	Die-Casting aluminun	Die-Casting aluminun	Die-Casting aluminun	
Power consumption(Max. /Ave.)	≤620W/m ² ; ≤310W/m ²	≤620W/m ² ; ≤310W/m ²	≤620W/m ² ; ≤310W/m ²	
Viewing angle	H:160°/V:160°	H:160°; V:160°	H:160°; V:160°	
Refresh rate	1920Hz/3840Hz	1920Hz/3840Hz	1920Hz/3840Hz	
Gray scale	14-16bit	14-16bit	14-16bit	
IP rating	IP30	IP30	IP65	
Serviceability	Front	Front	Front	
Operating voltage	AC100-240V~50/60Hz or AC200-240V~50/60Hz		AC100-240V~50/60Hz or AC200-240V~50/60Hz	
Operating temp/humidity	-20°C~+45°C; 10%~60%RH	-20°C~+45°C; 10%~60%RH	-20°C~+45°C; 10%~90%RH	
Storage temp/humidity	-40°C~+60°C; 10%~60%RH	-40°C~+60°C; 10%~60%RH	-40°C~+60°C; 10%~60%RH	
Lifetime	50000h	50000h	50000h	
Load-bearing	300kg	1500kg	2000kg	
Processing platform	Novastar	Novastar	Novastar	

*Product parameters are for reference only. *Products are subject to upgrades or changes without prior notice. *The final interpretation right of products is reserved by Glosline.

SHENZHEN GLOSHINE TECHNOLOGY CO.,LTD.

Tel: (86)755-29951691

Fax: (86)755-84419301

http://www.glosline.com

E-mail: international@glosline.cn

Add: No, 10, North Fuping Road, Pingdi Town, Longgang district, Shenzhen, China.



Glosline LED



GloslineLED



gloslinedisplay