


# Vanish Series

Outdoor Transparant LED Screen



500mm X 500mm  
1000mm X 500mm

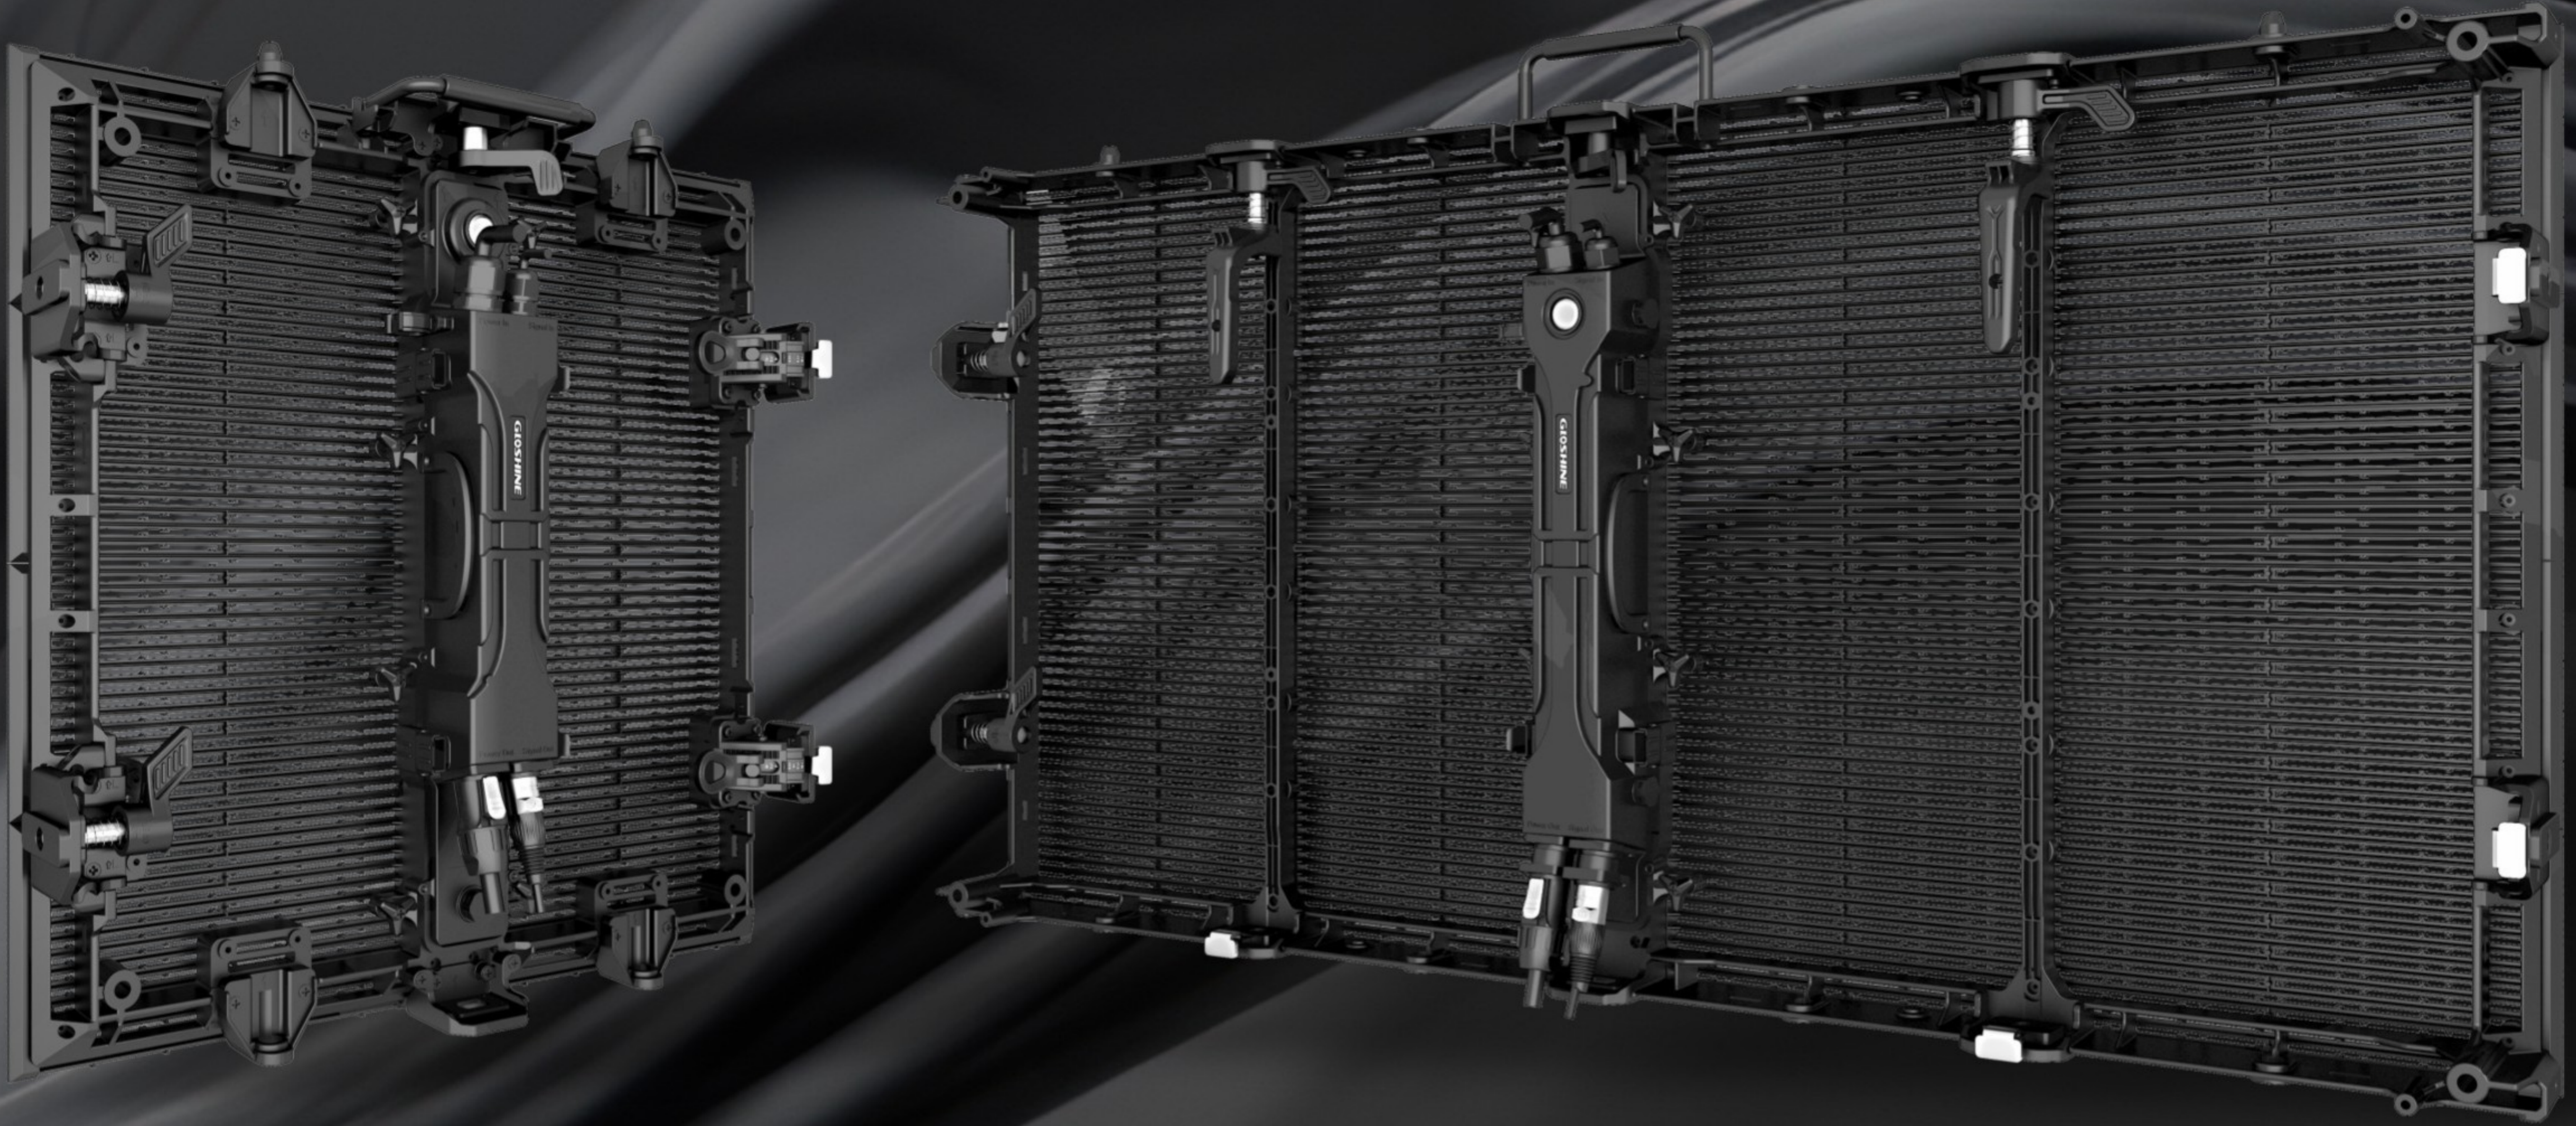




High Permeability




Vertical Angle splicing

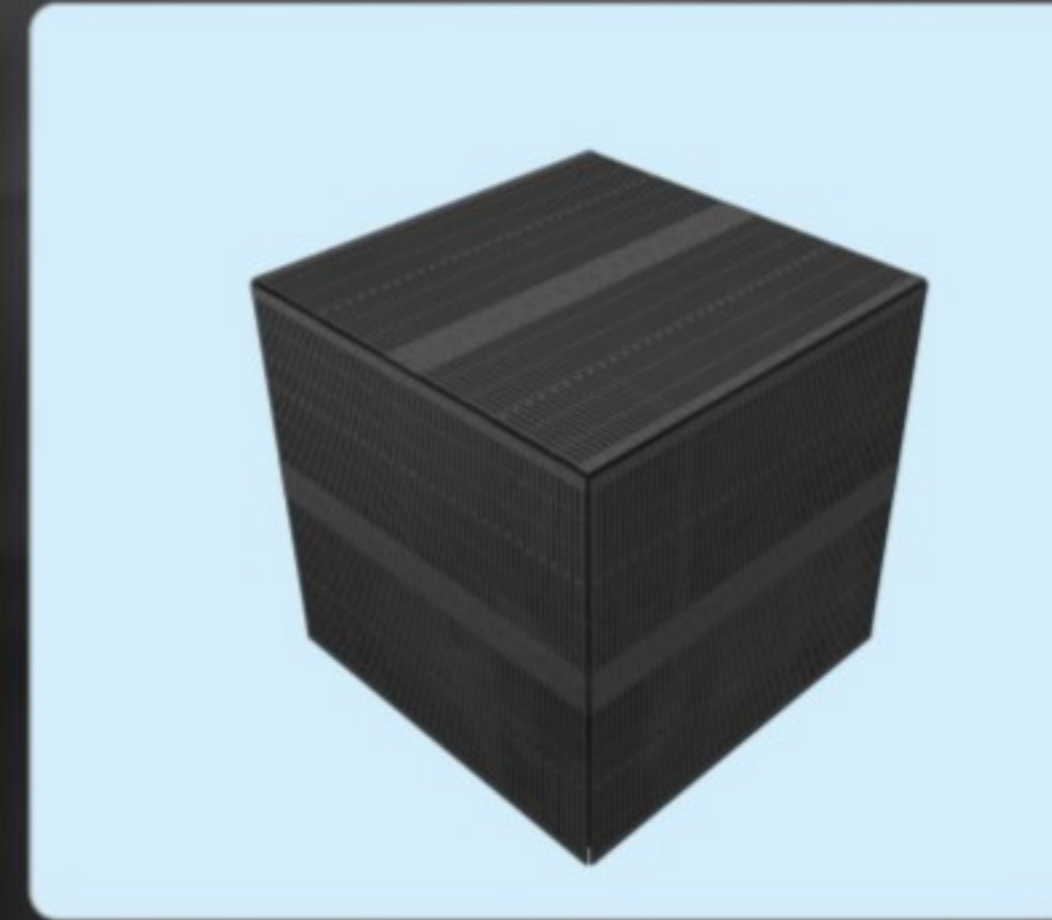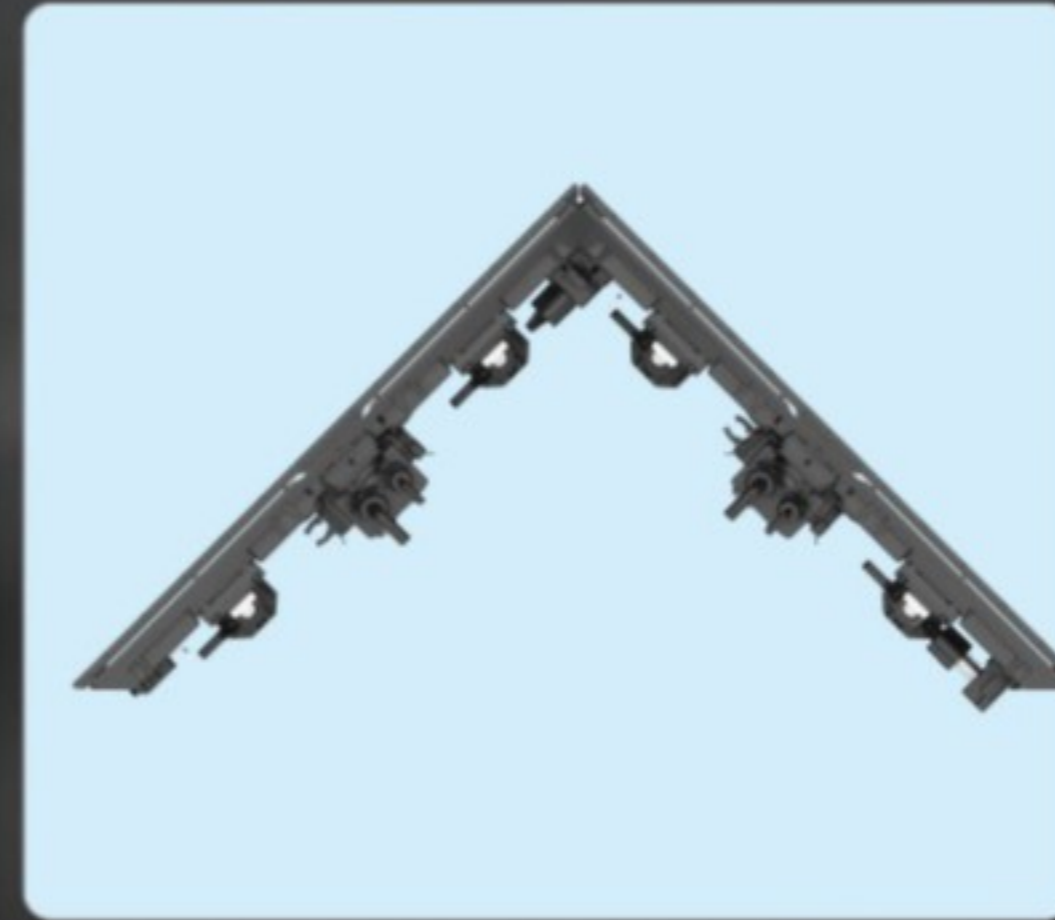

Multiple Side Locks (Optional)

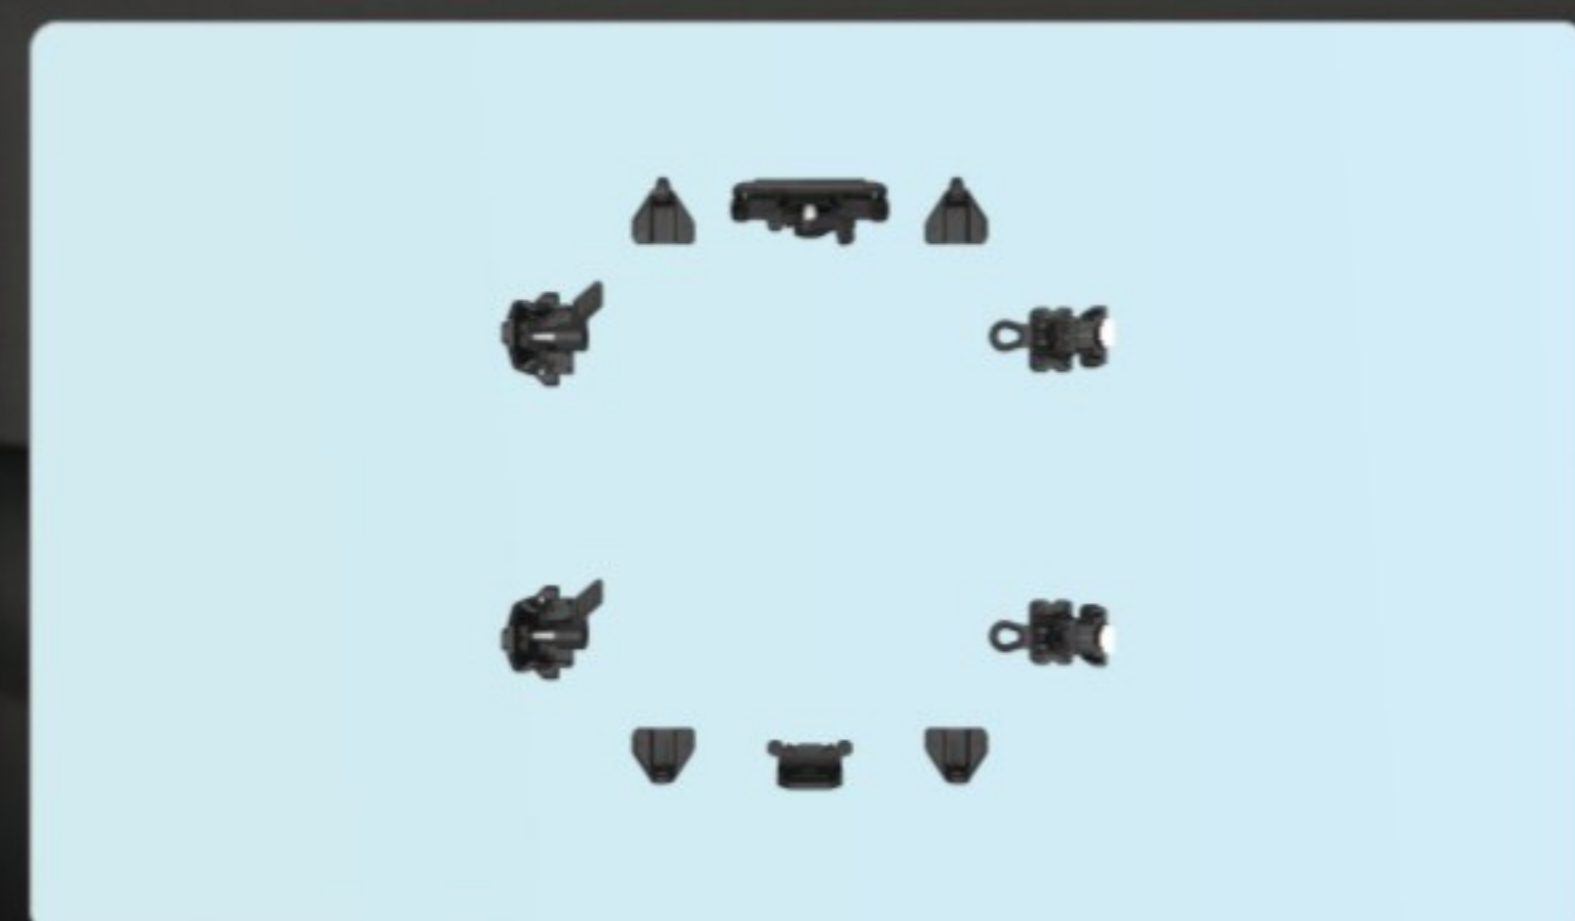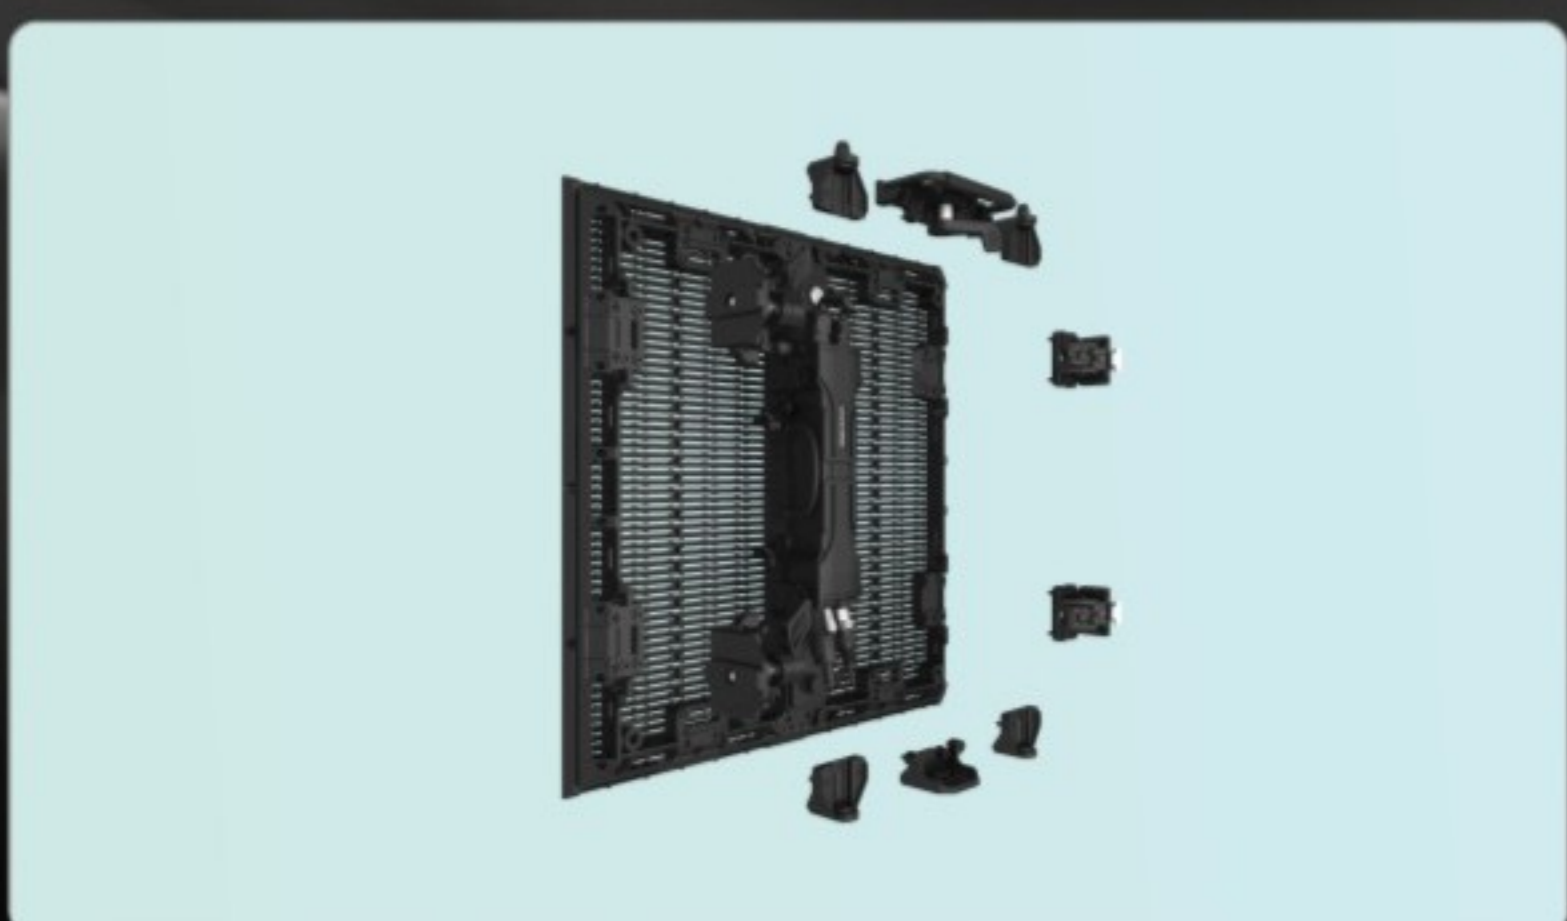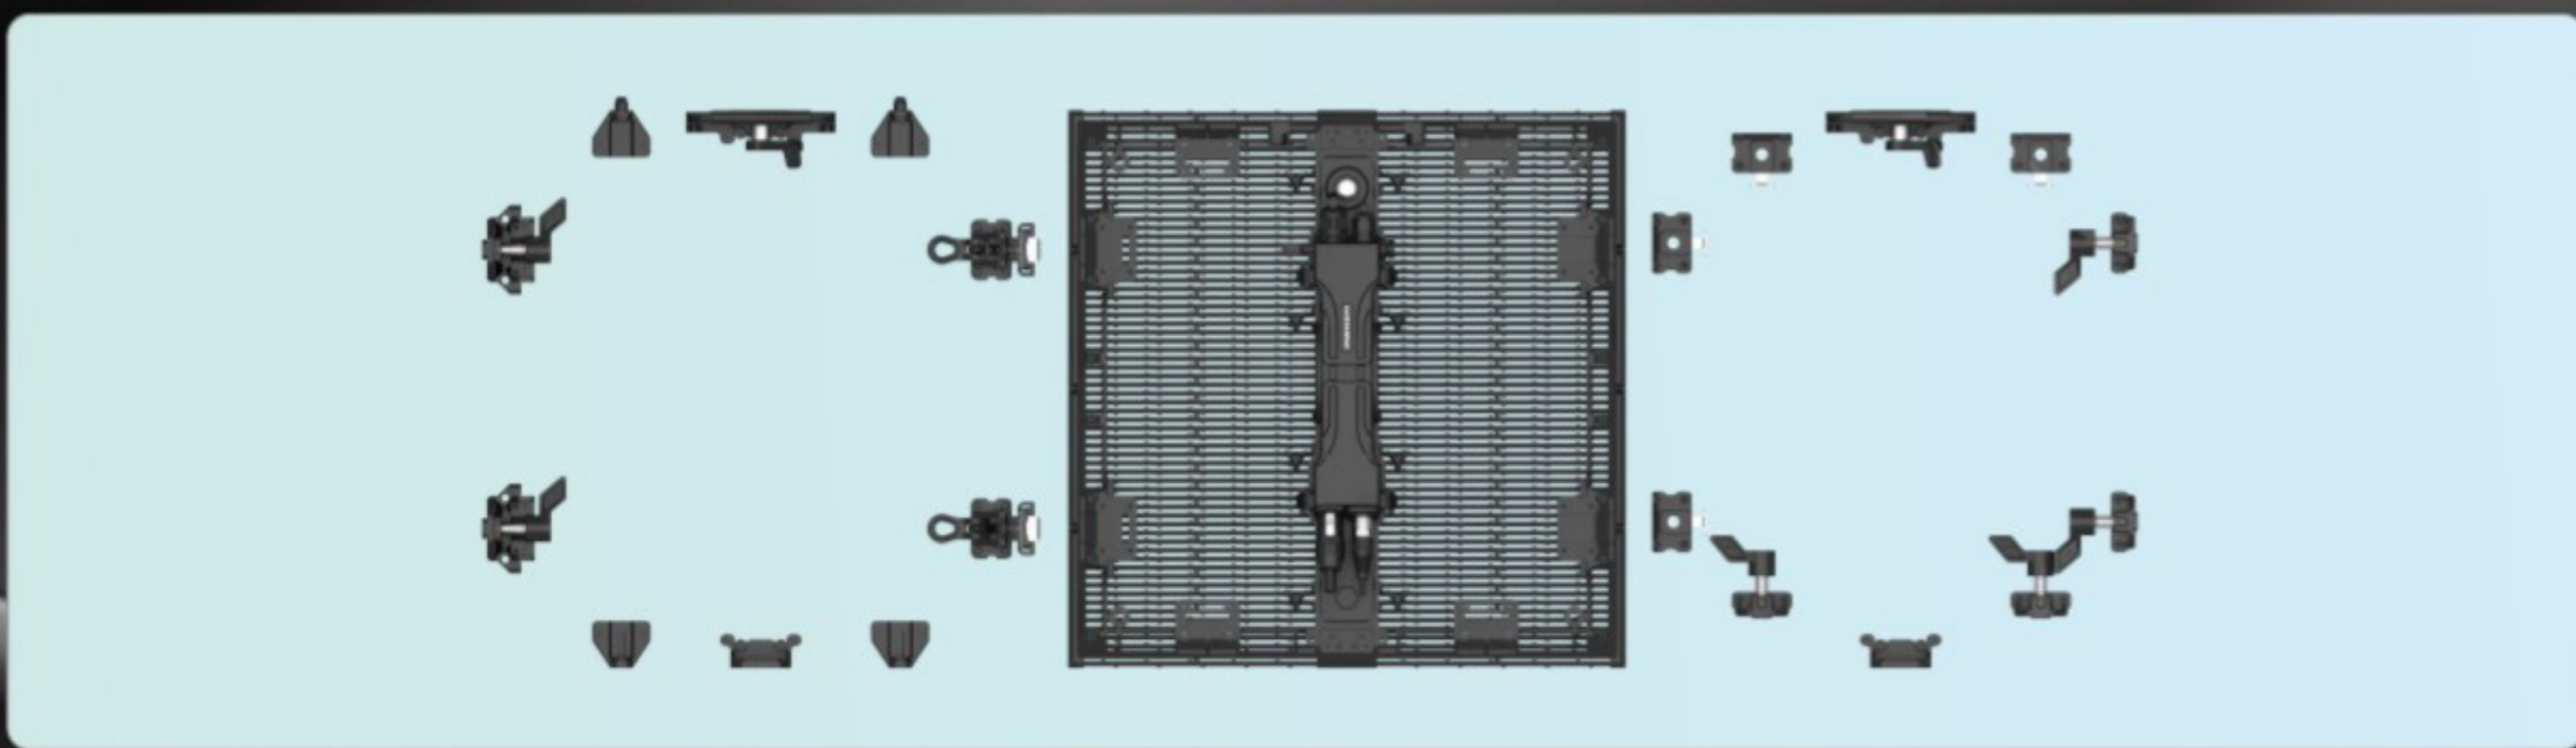

All-in-one Design

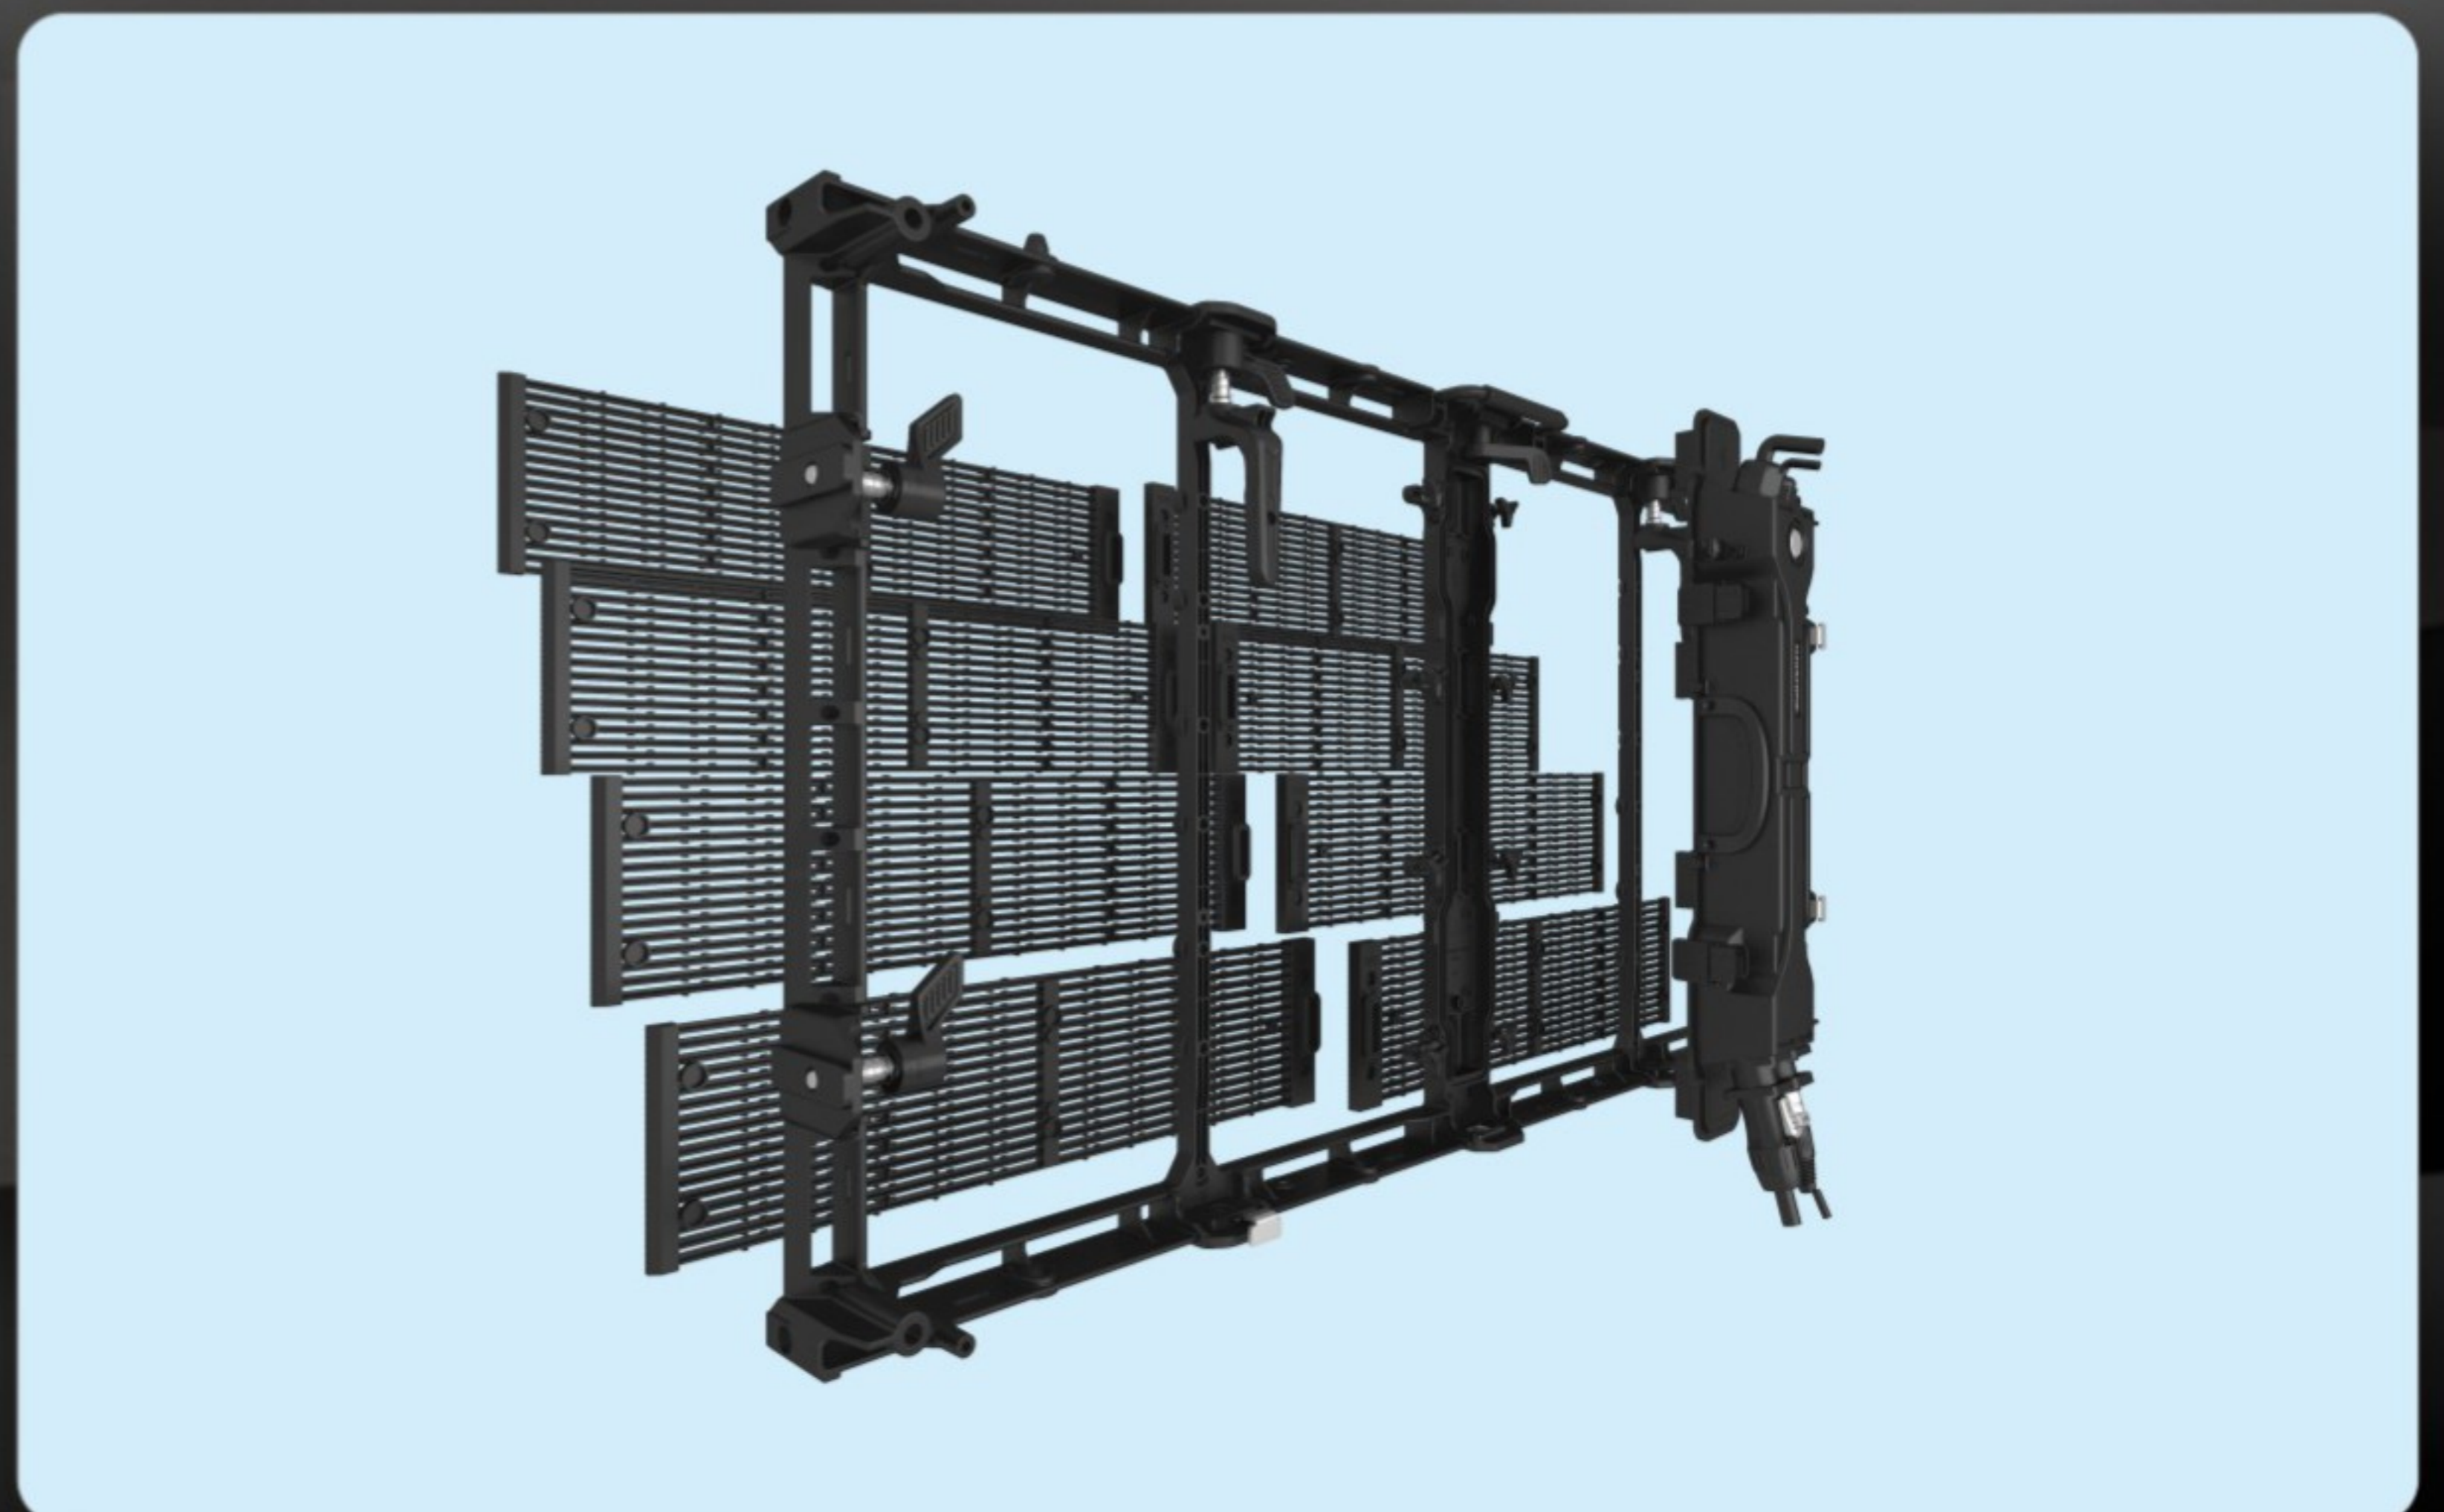

Parameter on the back



# Vanish Series

## Parameters

Model No.	VA3.91-7.81	VA8.93	VA mini3.91-7.81	VA mini8.93
Pixel Pitch	H3.91 V7.81mm	H8.93 V8.93mm	H3.91 V7.81mm	H8.93 V8.93mm
LED	SMD1921	SMD1921	SMD1921	SMD1921
Pixel Density	32768pixel/m <sup>2</sup>	12544pixel/m <sup>2</sup>	32768pixel/m <sup>2</sup>	12544pixel/m <sup>2</sup>
Brightness	2000-2500nits	2000-3000nits	2000-2500nits	2000-3000nits
Color Temperature	6500-9500K	6500-9500K	6500-9500K	6500-9500K
Scan	1/16	1/4	1/16	1/4
Panel Dimension(W×H×D)	1000mm×500mm×78mm	1000mm×500mm×78mm	500mm×500mm×78mm	500mm×500mm×78mm
	39.4"×19.7"×3.07"	39.4"×19.7"×3.07"	19.7"×19.7"×3.07"	19.7"×19.7"×3.07"
Panel Resolution	256*64pixel	112*56pixel	128*64pixel	56*56pixel
Transparent rate	35%	35%	35%	35%
Panel Weight	8.2Kg(18.08lb)±10%	8.2Kg(18.08lb)±10%	5.6Kg(12.35lb)±10%	5.6Kg(12.35lb)±10%
Cabinet Material	Die casting aluminium	Die casting aluminium	Die casting aluminium	Die casting aluminium
Max. Power Consumption	≤360W/m <sup>2</sup>	≤360W/m <sup>2</sup>	≤360W/m <sup>2</sup>	≤360W/m <sup>2</sup>
Ave. Power Consumption	≤120W/m <sup>2</sup>	≤120W/m <sup>2</sup>	≤120W/m <sup>2</sup>	≤120W/m <sup>2</sup>
Viewing Angle	H:160° V:140°	H:160° V:140°	H:160° V:140°	H:160° V:140°
Refresh Rate	1920Hz/3840Hz	1920Hz/3840Hz	1920Hz/3840Hz	1920Hz/3840Hz
Gray Scale	14-16bit	14-16bit	14-16bit	14-16bit
IP Rating	IP65	IP65	IP65	IP65
Radian	±10°	±10°	±10°	±10°
Protection technology	Gluing Craftwork (with shield&back shell)			
Max. Stacking/Hanging	7.5m	7.5m	7.5m	7.5m
Lifetime	50,000hrs	50,000hrs	50,000hrs	50,000hrs
Operating Temp/Humidity	20°C ~ +40°C; 10%-60%RH	20°C ~ +40°C; 10%-60%RH	20°C ~ +40°C; 10%-60%RH	20°C ~ +40°C; 10%-60%RH
Storage Temp/Humidity	-40°C ~ +60°C; 10%-60%RH	-40°C ~ +60°C; 10%-60%RH	-40°C ~ +60°C; 10%-60%RH	-40°C ~ +60°C; 10%-60%RH

\*Product parameters are for reference only. \*Products are subject to upgrades or changes without prior notice. \*The final interpretation right of products is reserved by Glosline.

### SHENZHEN GLOSHINE TECHNOLOGY CO.,LTD.

Tel: (86)755-29951691

Fax: (86)755-84419301

http://www.gloshine.com

E-mail: international@gloshine.cn

Add: No, 10, North Fuping Road, Pingdi Town, Longgang district, Shenzhen, China.



Glosline LED



GloslineLED



gloshinedisplay